GOLDEN® GC CROWN

LVT FLOORING EXPERIENCE

E - CATALOG

LUXURY VINYL FLOORING 3MM


Kementerian Perindustrian REPUBLIK INDONESIA

TKDN TINGKAT KOMPONEN DALAM NEGERI

No. Sertifikat : 2950/SJ-IND.8/TKDN/3/2023


WOOD
SERIES
WEARLAYER : 0.2 mm
SIZE : 152.4mm x 914.4mm
PACKING : 3mm = 24 pcs : 3.34m²
MATERIAL : Virgin / Stone Composition
To Get More Info
About GOLDEN CROWN
GOLDEN CROWN
Flooring Superstore
ldi-goldencrown.co.id

GC 301 (ABERDEEN OAK)

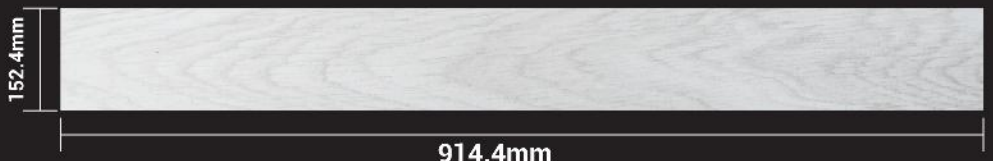

GC 302 (WHITE BAMBOO)



GC 323 (WASHED OAK)



GC 303 (LAGENDARY GRAY)



GC 304 (MENZEL TEAK)





GC 305 (VICENZA OAK)





GC 306 (GOLDEN BLISS)






GC 307 (LATTE CHERRY)





GC 309 (STRIPS BAMBOO)



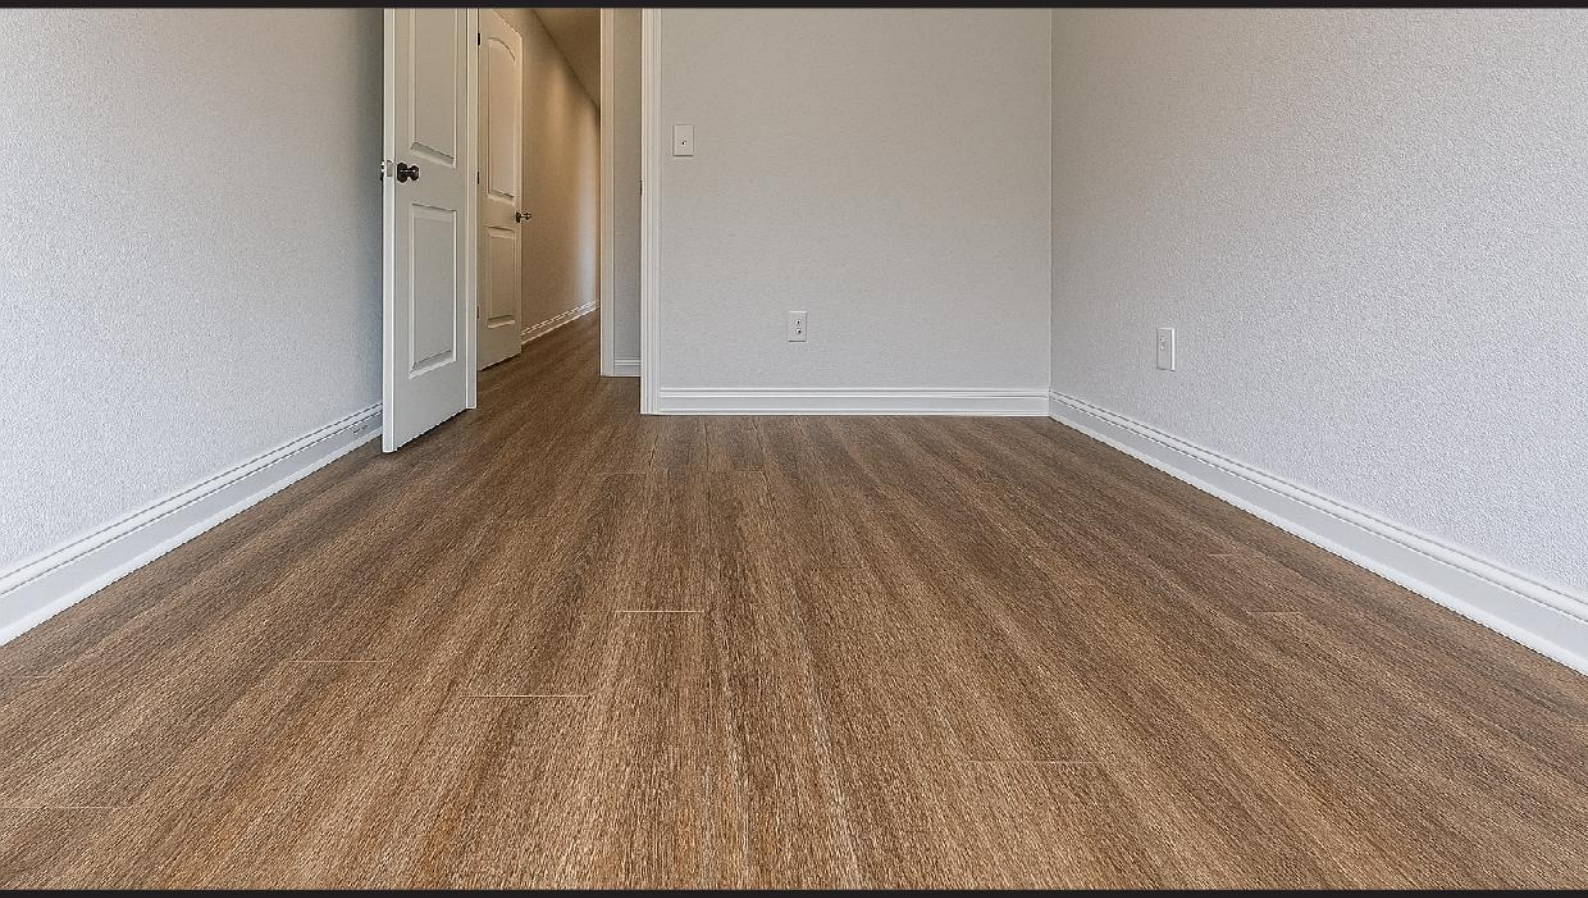

GC 310 (GINZA WOOD)





GC 311 (BUSAN WALNUT)





GC 312 (GRANDE OAK)





GC 325 (NATURAL BEECH)





GC 313 (SWEET CHERRY)





GC 314 (MIX MAPLE)






GC 315 (RUSTIC WALNUT)



GC 316 (MODERN WOOD)

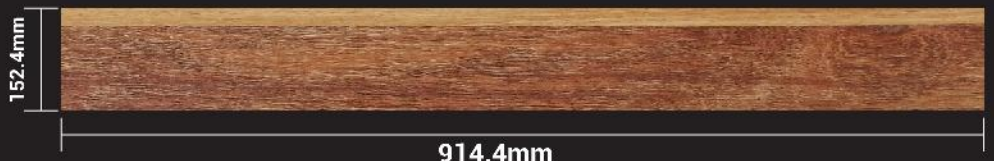

GC 317 (WARM CHERRY)






GC 318 (ALMOND TEAK)





GC 319 (TIGER WOOD)

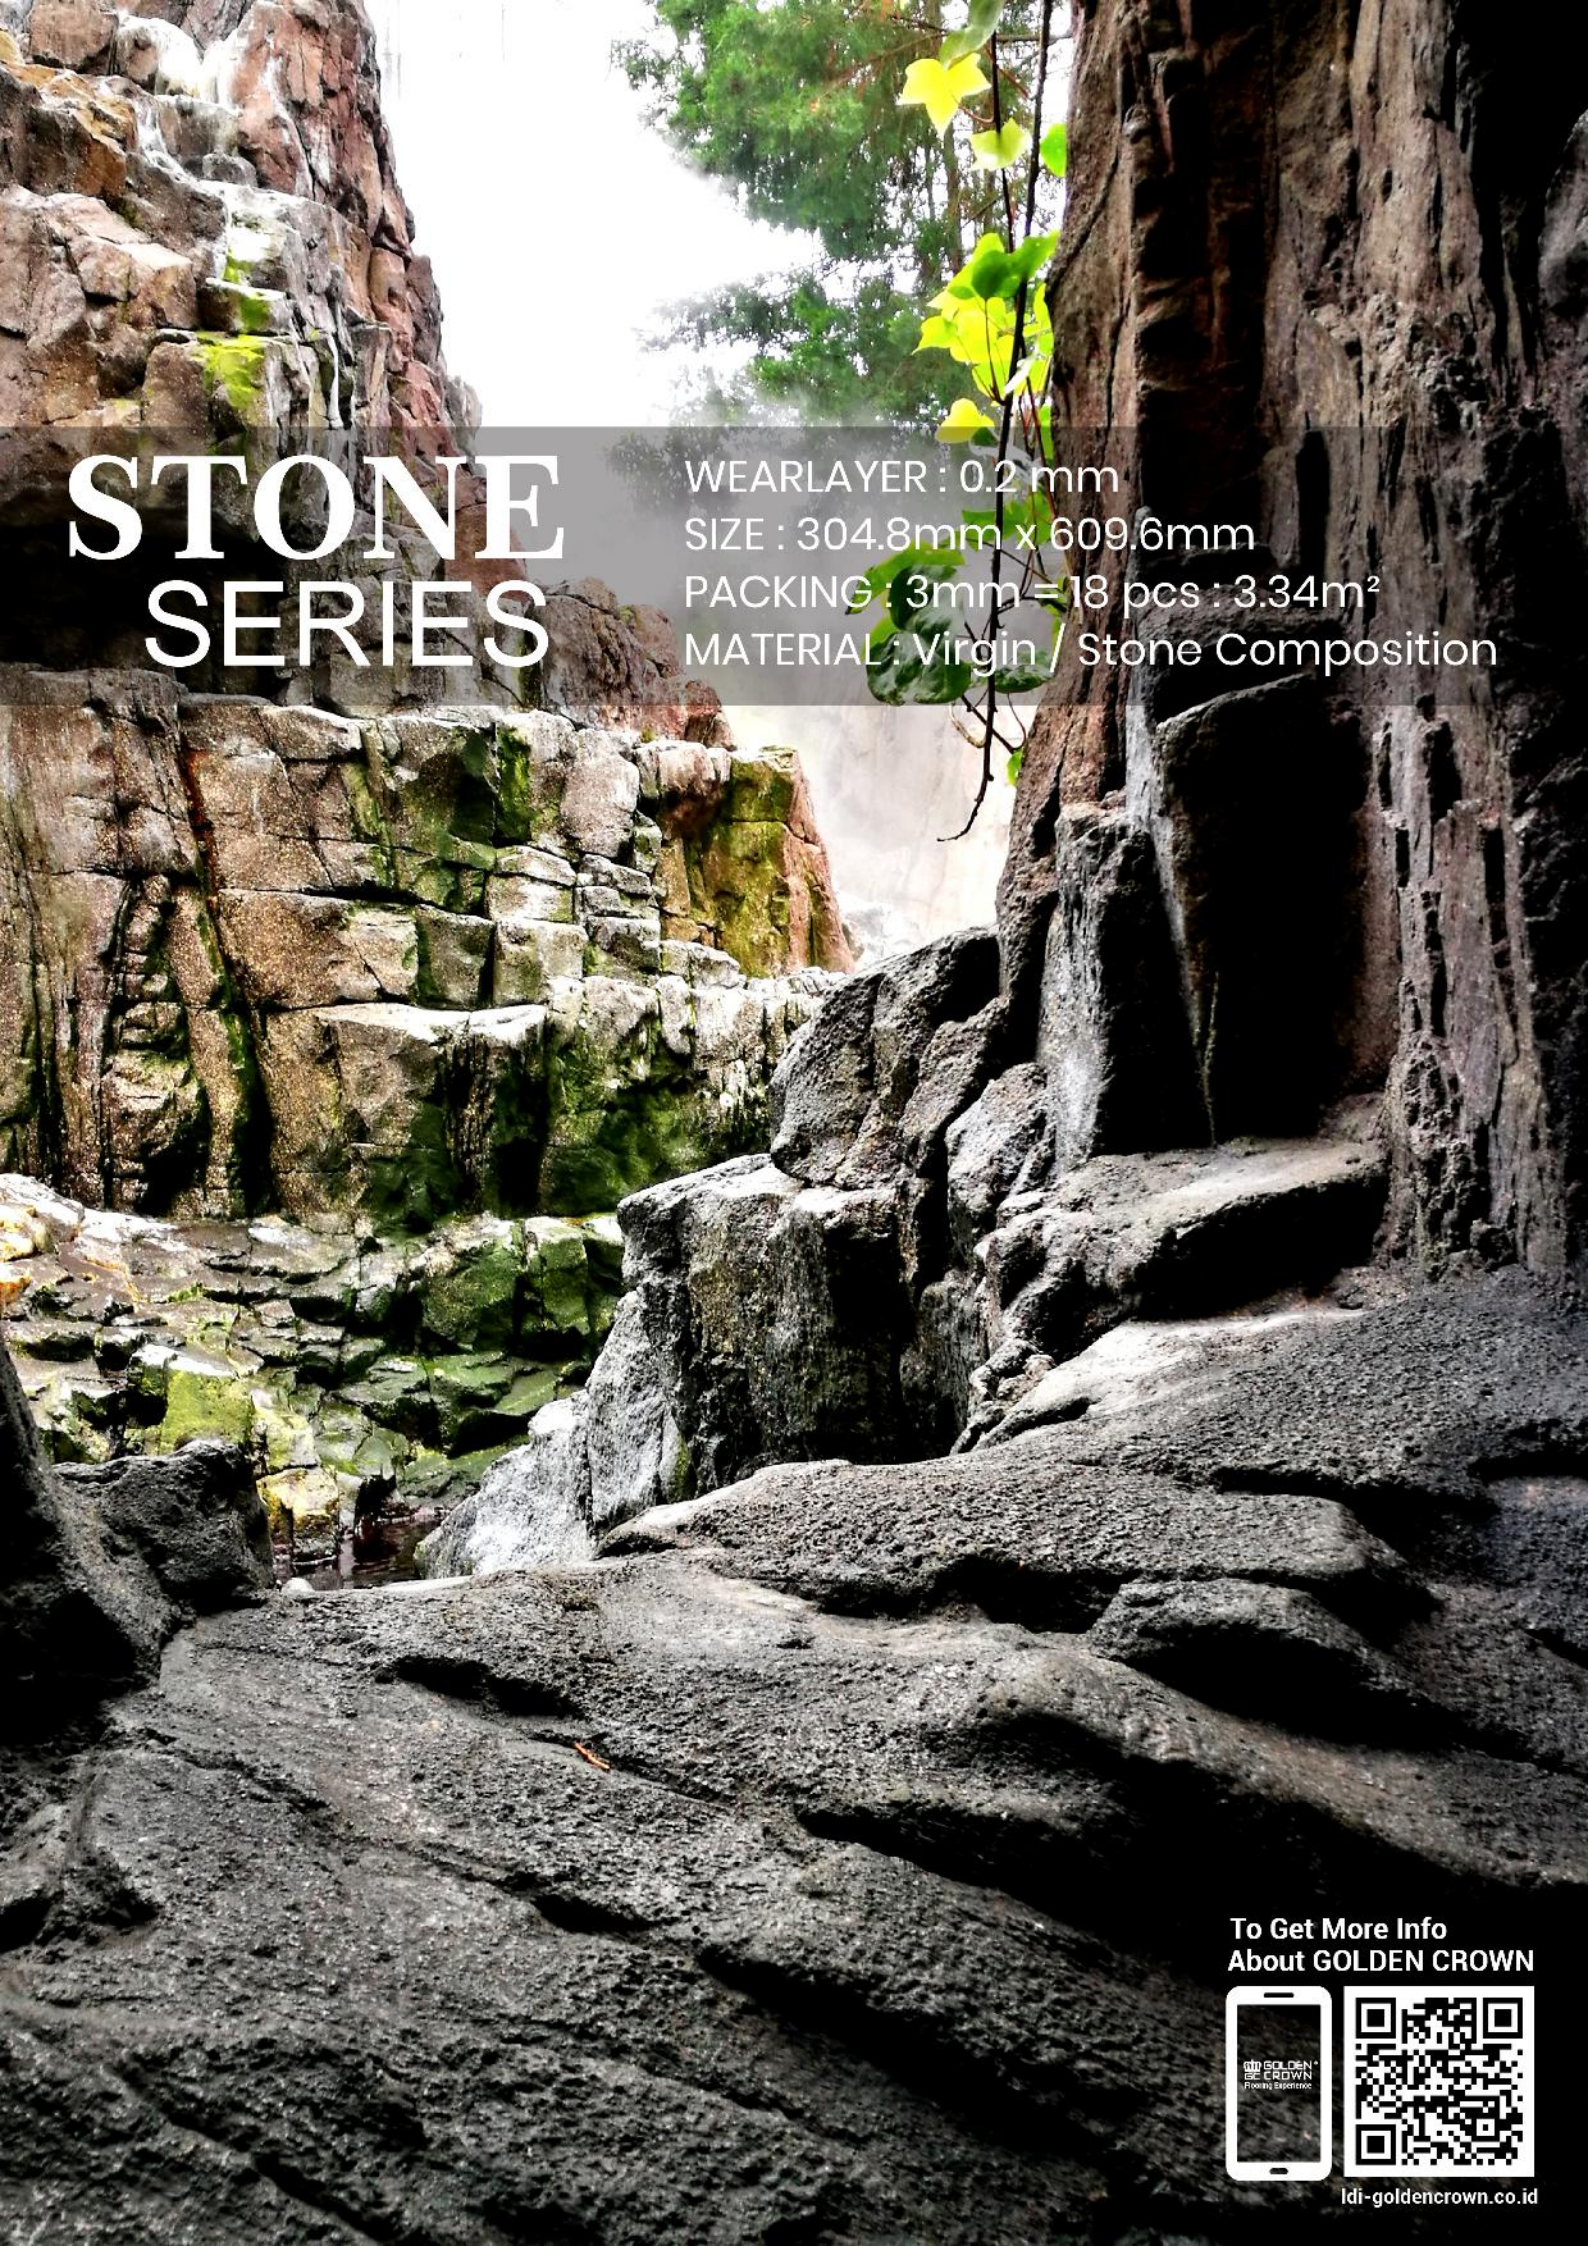



STONE
SERIES
WEARLAYER : 0.2 mm
SIZE : 304.8mm x 609.6mm
PACKING : 3mm = 18 pcs : 3.34m²
MATERIAL : Virgin / Stone Composition
To Get More Info
About GOLDEN CROWN
GOLDEN CROWN
Flooring experience
ldi-goldencrown.co.id

GC 320 (LIGHT GRAY MARBLE)



GC 321 (GRAY MARBLE)

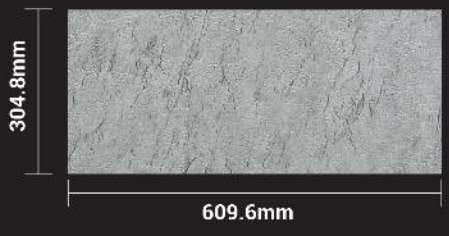




GC 326 (GRAY SLATE MARBLE)





GC 322 (DARK MARBLE)

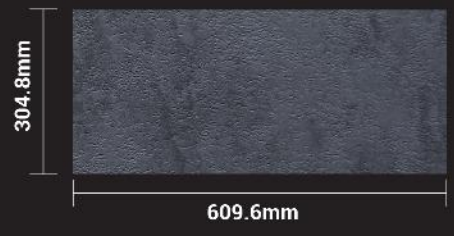

TECHNICAL DATA

CHARACTERISTICS	TEST METHOD	PASS
Resistance to chemicals	EN 423:1993 Class 0	☑
Bearing castor	EN 425:94	☑
Dimension Squareness and straightness	EN 427:94	☑
Thickness - overall	EN 428:93	☑
Thickness - Wear layer	EN 429:93	☑
Residual indentation after static load	EN 433:94	☑
Dimensional stability and curling after exposure to heat	EN 434:94	☑
Shrinkage rate	≤0.25%	☑
Curling	≤2mm	☑
Flexibility	EN 435:94 (A) Bend around 20mm mandrel shows No sign of cracking	☑
Abrasion resistance	EN 660-1:99	☑
Color fastness to light	EN 20 ISO 105-B02 6 or above	☑
Toxic element test	EN 71-3	☑
Specific gravity	ASTM D792:91	☑
Coefficients of friction	ASTM D1894:01	☑
Sound reduction	DIN 52210:4db	☑
Flammability	EN -71-2	☑
Smoke density	DIN4102/ASTM D 2843:99 Class B1	☑
Electrical resistance	EN1081 Method C	☑
Fungus test	ASTM G21:96 Grade I	☑
IMO resolution	MSC61[67] Part 2 MSC61[67] Part 5	☑










Floor Tile Image Dissection

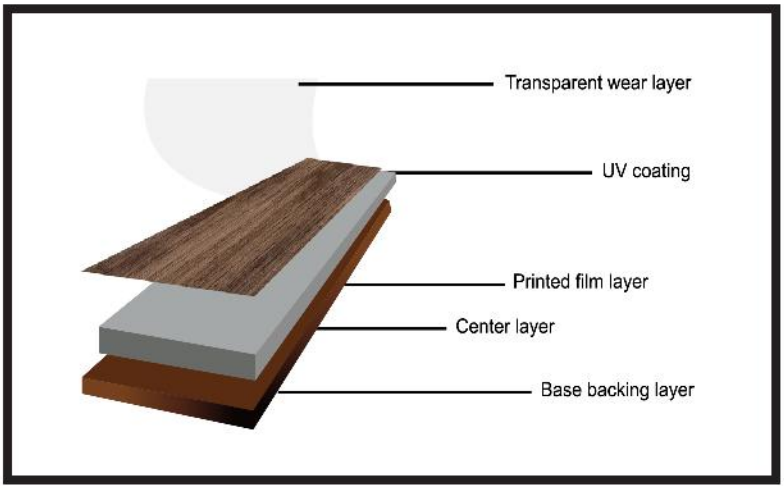

WOOD SERIES



STONE SERIES

